


LIGHTING

catalogue 2019

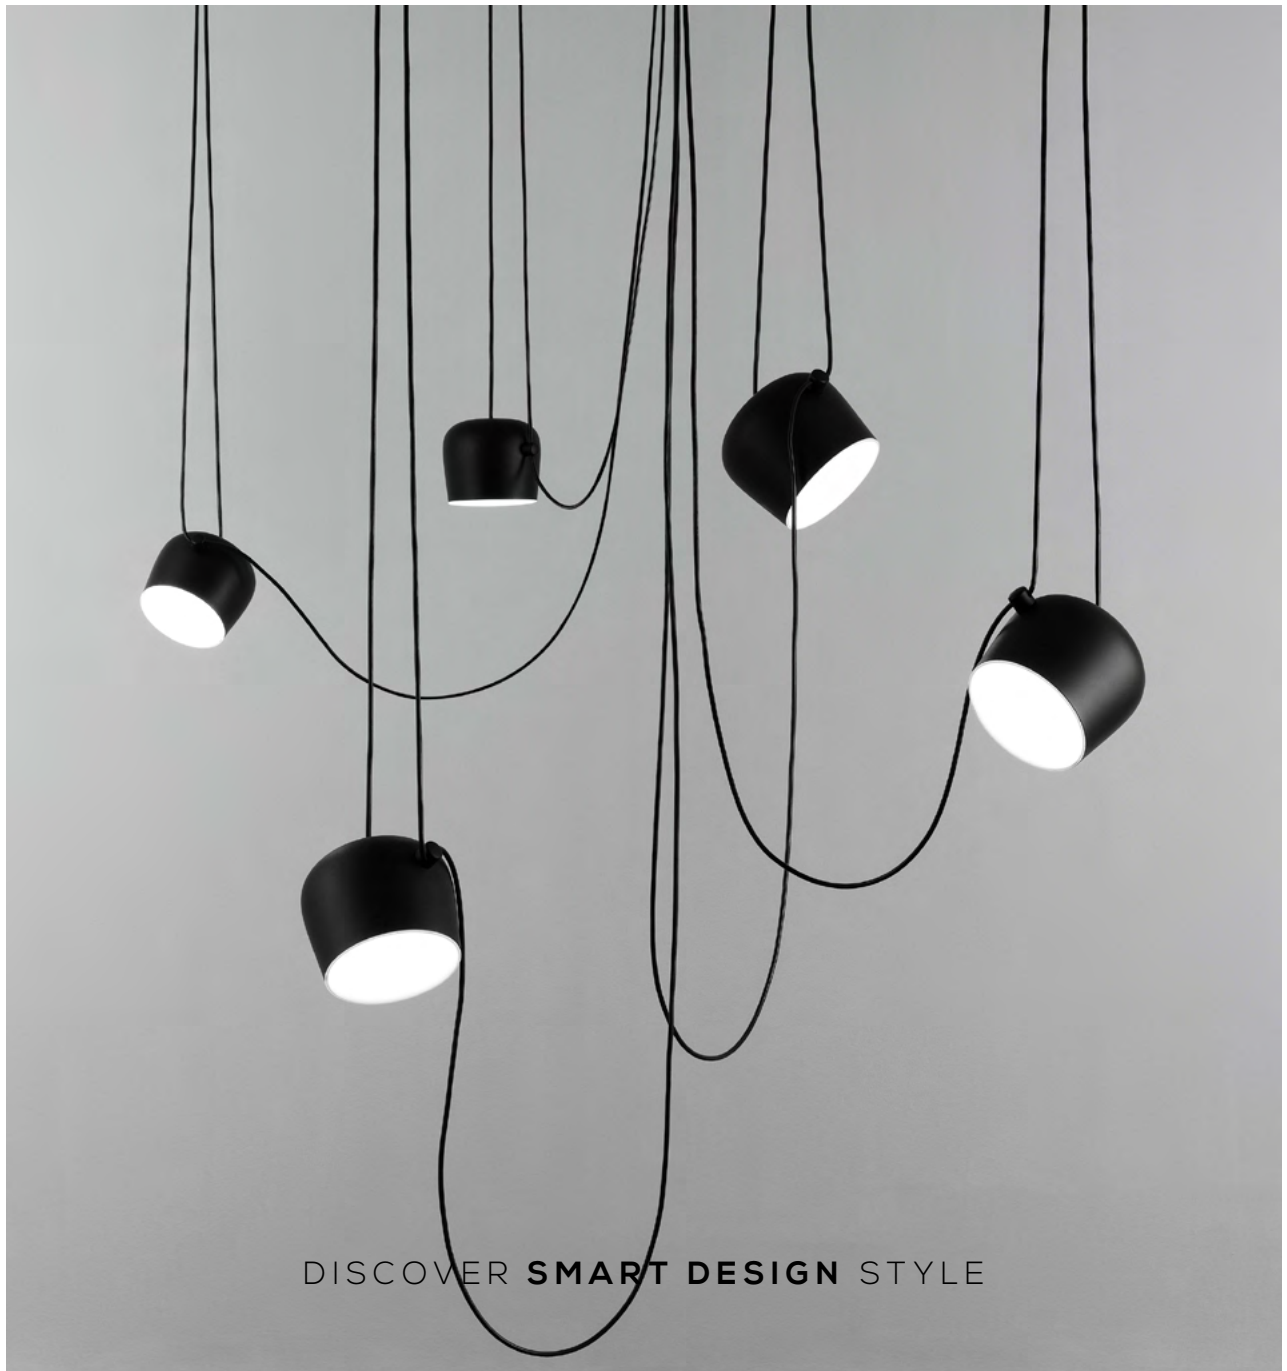

SMART
DESIGN
EXPO

INDEX

1 _ GENERAL LIGHTING

APOLLO LED
P. 8



APOLLO MH 70W
P. 8



EOS LED
P. 10



KRONOS
P. 10



BOLONIA
P. 12



KANLUX MH 400W
P. 12



PAR 575
P. 14



PAR LED COMPACT
P. 12



PAR LED CAMEO
P. 16



PAR LED COB 250W
P. 16



FLOOR LAMP
KANLUX BERG DL-350
P. 18



ELATION KL FRESNEL
P. 18



WATER EFFECT LIGHT
P. 19



INDEX

2 _ DOWNLIGHT

HQI 35W
P. 22



HQI 150 W
P. 23



LED CEILING LIGHT FITTINGS 6W
P. 24



LED CEILING LIGHT FITTINGS 12W
P. 24



LED CEILING LIGHT FITTINGS 15W
P. 25



BENQ LED CEILING LIGHT FITTINGS
P. 25



LED CEILING LAMP FI60
P. 26



KOBI OH42 DOUBLE / TRIPPLE
P. 26



DOWNLIGHT COB 10W
P. 28
color temperature - cold / neutral / warm



LED CEILING LIGHT FITTINGS COB
10W SUPER LED
P. 30
color temperature - cold



LED CEILING LIGHT FITTINGS
COB 12W
P. 30
color temperature - cold: 6000 K



LED CEILING LIGHT FITTINGS
COB 15W
P. 31
color temperature - cold: 6000 K



LED CEILING LIGHT FITTINGS
COB 7W
P. 31
color temperature - cold



LED CEILING LIGHT FITTINGS
KOBI OH 36
P. 32



INDEX

3 _ ARMS

JEWELLERY ARM LED LIGHT
30 CM
P. 36



JEWELLERY ARM LED LIGHT
22 CM
P. 36



HALOGEN ARM LIGHT ELSTAR
P. 37



LED ARM LIGHT
P. 37



4 _ LIGHTBOX

LED PANELS
P. 42-43



EDGE-LIT LIGHTBOX
P. 44-45



5 _ WALL LAMP

ANTIKA BLACK
P. 48



LOFT
P. 49



REALITY
P. 50



BROLO
P. 50



LILHOLMEN
P. 51



INSPIRE
P. 51




INDEX

6 _ DECORATIVE LAMPS

EGLO RONDO
P. 54




CUMULUS
P. 54



TAMEN INSPIRE
P. 56



ALFA BOLT
P. 56



ARABICA
P. 58



PORTORYKO
P. 58



CARUBA
P. 60



INSPIRE IRING
P. 60



BAS
P. 62



KOPENHAGEN LOFT
P. 62




TARBES
P. 64



INSPIRE BYRON
P. 64



RAKIJA
P. 65



FLOS AIM
P. 65




UPSTREET
P. 66




INDUSTRIAL DESIGN
P. 67



1 _ GENERAL LIGHTING

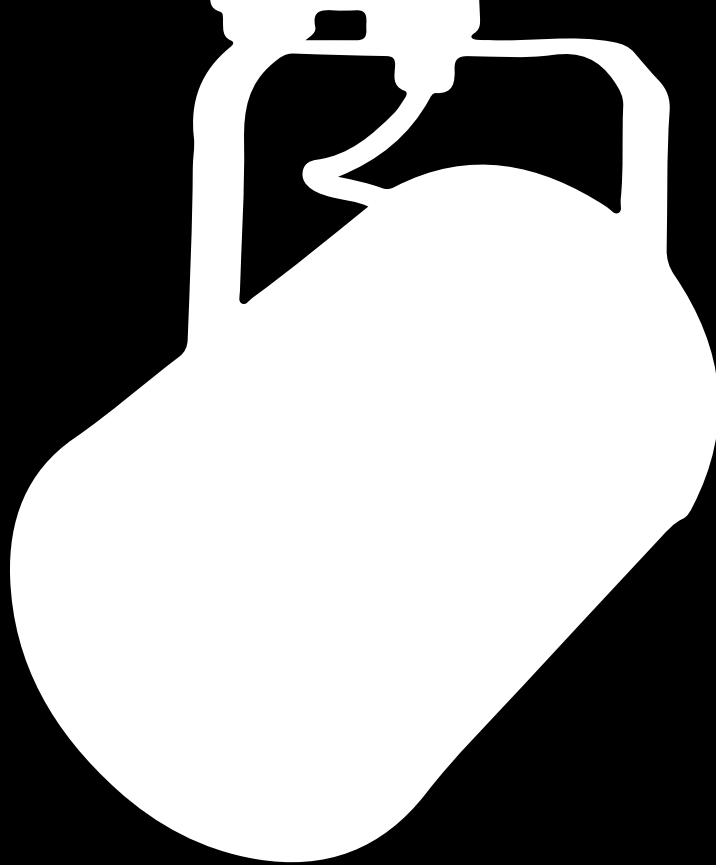




a: $\varnothing$ 145 mm
b: 190 mm
c: 170 mm

APOLLO LED

+ info

quantity	43
reordering option	yes
wattage [W]	37
luminous flux [Lm]	4900
color temperature [K]	4000
base	LED COB
beam angle [°]	24
weight [kg]	2,3
optimal installation height [m]	3 - 4
max installation height [m]	5
min installation height [m]	3
heat output	low
cable length [m]	bus duct
material	aluminium
color	black



a: $\varnothing$ 145 mm
b: 190 mm
c: 170 mm

APOLLO MH 70W


+ info

quantity	angle 12 black: 41 angle 24 black: 53 angle 12 white: 5 angle 24 white: 113 angle 38 white: 19
reordering option	no
wattage [W]	70
luminous flux [Lm]	6300
color temperature [K]	3000 - 4200
base	G12
angle [°]	12 - 38
weight [kg]	1,9
optimal installation height [m]	3 - 4
max installation height [m]	5
min installation height [m]	3
heat output	medium
cable length [m]	bus duct
material	aluminium
color	black / white






Apollo LED / Phillips / 2018 / ISE / Amsterdam

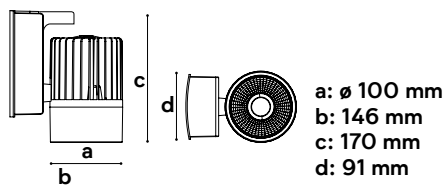

EOS LED

+ info

quantity	black - color temperature warm: 10 black - color temperature neutral: 58 white - color temperature neutral: 123
reordering option	yes
wattage [W]	37
luminous flux [Lm]	4700 - 4900
color temperature [K]	3000 - 4000
base	LED COB
beam angle [°]	24
weight [kg]	1,2
optimal installation height [m]	3 - 4
max installation height [m]	4
min installation height [m]	3
heat output	low
cable length [m]	bus duct
material	aluminium
color	black / white



KRONOS

+ info


quantity	64
reordering option	nie
wattage [W]	70
luminous flux [Lm]	6600
color temperature [K]	3000 - 4200
base	G12
beam angle [°]	20
weight [kg]	1,1
optimal installation height [m]	3 - 4
max installation height [m]	4,5
min installation height [m]	2,8
heat output	high
cable length [m]	bus duct
material	aluminium
color	white



Kronos / VOX / 2018 / Warsaw Home / Warsaw

BOLONIA


+ info

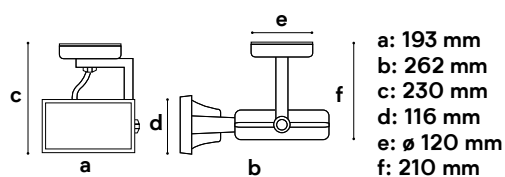

	cold	neutral	neutral
quantity	80	21	20
reordering option	no	no	no
wattage [W]	150	150	150
luminous flux [Lm]	12000	12000	12000
color temperature [K]	5350	4200	4200
base	RX7S-24	RX7S-24	RX7S-24
beam angle [°]	90 - 120	90 - 120	90 - 120
weight [kg]	4,35	4,35	4,35
optimal instalation height [m]	4 - 5	4 - 5	4 - 5
max instalation height[m]	5	5	5
min instalation height[m]	3	3	3
heat output	high	high	high
cable length [m]	1	1	bus duct
material	aluminium	aluminium	aluminium
color	grey	grey	grey

KANLUX MH 400W

+ info

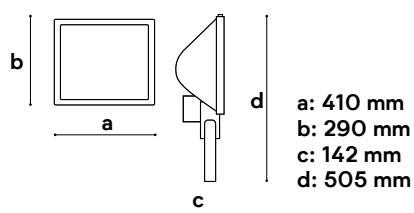

quantity	173
reordering option	yes
wattage [W]	400
luminous flux [Lm]	41000
color temperature [K]	4500
base	E40
beam angle [°]	180
weight [kg]	7,9
optimal instalation height [m]	5 - 6
max instalation height[m]	6
min instalation height[m]	5
heat output	high
cable length [m]	1,5
material	aluminium
color	black




Bolonia / NYC / 2018 / ITB / Munich

PAR 575

+ info


quantity	46 - black/ 33 - silver
reordering option	tak
wattage [W]	575
luminous flux [Lm]	49000
color temperature [K]	7200
base	GX 9,5
beam angle [°]	25
weight [kg]	13,6
optimal instalation height [m]	5 - 6
max instalation height [m]	7
min instalation height [m]	5
heat output	high
cable length [m]	1
material	metal
color	black / silver



PAR LED COMPACT


+ info

quantity	25
reordering option	yes
wattage [W]	23
luminous flux [Lm]	-
color temperature [K]	3200 - 6000
base	LED
beam angle [°]	40
weight [kg]	2,6
optimal instalation height [m]	3 - 4
max instalation height [m]	4
min instalation height [m]	3
heat output	low
cable length [m]	1
material	aluminium
color	black





PAR 575 / Solaris / 2017 / Busworld / Kortrijk




a: 230 mm
b: 230 mm
c: 135 mm

PAR LED CAMEO

+ info

quantity	64
reordering option	yes
wattage [W]	140
luminous flux [Lm]	16000
color temperature [K]	2700 - 6500
base	LED
beam angle [°]	30
weight [kg]	5
optimal instalation height [m]	4 - 5
max instalation height [m]	5,5
min instalation height [m]	3,5
heat output	low
cable length [m]	1
material	metal, glass
color	black



a: 230 mm
b: 270 mm
c: 20mm

PAR LED COB 250 W

+ info

quantity	49
reordering option	yes
wattage [W]	250
luminous flux [Lm]	30 000
color temperature [K]	2000-9000
base	COB 5w1
beam angle [°]	37
weight [kg]	3,6
optimal instalation height [m]	4
max instalation height [m]	5
min instalation height [m]	3,5
heat output	low
cable length [m]	1,85
material	plastic
color	black




PAR LED CAMEO / Marmite / 2018 / KBIS / Orlando

FLOOR LAMP KANLUX BERG DL-350

+ info



quantity	43
reordering option	yes
wattage [W]	35
luminous flux [Lm]	550
color temperature [K]	2700-6500
base	GU-10
beam angle [°]	120
weight [kg]	0,75
optimal instalation height [m]	floor
heat output	low
cable length [m]	-
material	stainless steel
color	silver




a: 145 mm
b: 109 mm
otwór montażowy: 99 mm

ELATION KL FRESNEL

+ info



quantity	50
reordering option	yes
wattage [W]	350
luminous flux [Lm]	-
color temperature [K]	5600
base	LED
beam angle [°]	11 - 57
weight [kg]	12,7
optimal instalation height [m]	5-6
max instalation height [m]	6
min instalation height [m]	5
heat output	low
cable length [m]	1,0
material	aluminium
color	black




a: 326 mm
b: 456 mm
c: 410mm

WATER EFFECT LIGHT

+ info

quantity	10
reordering option	yes
wattage [W]	23,8
luminous flux [Lm]	-
color temperature [K]	2700 - 6500
base	LED
beam angle [°]	120
weight [kg]	3,5
optimal instalation height [m]	3
max instalation height[m]	3
min instalation height[m]	3
heat output	low
cable length [m]	1,5
material	steel
color	black



2 _ DOWNLIGHT






HQI 35W

+ info

quantity	40
reordering option	yes
wattage [W]	35
luminous flux [Lm]	3045
color temperature [K]	4200
base	G12
beam angle [°]	90 - 120
weight [kg]	2,7
optimal instalation height [m]	3 - 4
max instalation height[m]	4
min instalation height[m]	3
heat output	medium
cable length [m]	1
material	metal
color	white




a: ø 190 mm
b: 172 mm
mounting hole: 182 mm



HQI 150W

+ info

quantity	68
reordering option	yes
wattage [W]	150
luminous flux [Lm]	13000
color temperature [K]	4200
base	G12
beam angle [°]	90
weight [kg]	3,9
optimal instalation height [m]	3 - 4
max instalation height[m]	4
min instalation height[m]	3
heat output	high
cable length [m]	1
material	aluminium
color	silver



a: ø 205 mm
b: 183 mm
mounting hole: 190 mm




HQI 150W / VOX / 2018 / PSB / Kielce

LED CEILING LIGHT FITTINGS 6W

+ info



quantity	16
reordering option	no
wattage [W]	6
luminous flux [Lm]	-
color temperature [K]	6500
base	LED
beam angle [°]	120 - 160
weight [kg]	0,2
optimal instalation height [m]	do 2
max instalation height[m]	2
min instalation height[m]	0,6
heat output	low
cable length [m]	1
material	plastic
color	white




LED CEILING LIGHT FITTINGS 12W

+ info



quantity	22
reordering option	no
wattage [W]	12
luminous flux [Lm]	960
color temperature [K]	6000 - 6400
base	LED COB
beam angle [°]	90
weight [kg]	0,45
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1
material	aluminium
color	white




LED CEILING LIGHT FITTINGS 15W

+ info



quantity	43
reordering option	no
wattage [W]	15
luminous flux [Lm]	-
color temperature [K]	6000 - 6500
base	LED
beam angle [°]	120 - 160
weight [kg]	0,5
optimal instalation height [m]	do 2,8
max instalation height[m]	do 2,8
min instalation height[m]	0,6
heat output	low
cable length [m]	1
material	plastic
color	white




LED CEILING LIGHT FITTINGS BENQ

+ info




quantity	22
reordering option	no
wattage [W]	7
luminous flux [Lm]	620
color temperature [K]	6500
base	LED SMD
beam angle [°]	40
weight [kg]	0,35
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,5
material	aluminium
color	white



LED CEILING LIGHT FITTINGS FI60

+ info




a: $\varnothing$ 85 mm
mounting hole: 60 mm

quantity	469
reordering option	yes
wattage [W]	3 - 10
luminous flux [Lm]	350 - 560
color temperature [K]	2700 - 6500
base	GU - 10
beam angle [°]	90 - 120
weight [kg]	0,10
optimal instalation height [m]	do 2
max instalation height[m]	do 2
min instalation height[m]	0,6
heat output	low
cable length [m]	-
material	aluminium
color	silver

KOBİ OH42 DOUBLE / TRIPLE

+ info



double:
a: 220 mm
b: 120 mm
c: 90 mm

triple:
a: 320 mm
b: 120 mm
c: 90 mm



	double	triple
quantity	6	45
reordering option	yes	yes
wattage [W]	2 x 10	3 x 10
luminous flux [Lm]	1140	1710
color temperature [K]	2700 - 6500	2700 - 6500
base	GU - 10	GU - 10
beam angle [°]	90 - 160	90 - 160
weight [kg]	1,0	1,3
optimal instalation height [m]	2 - 3	2 - 3
max instalation height [m]	3	3
min instalation height [m]	2	2
heat output	medium	medium
cable length [m]	1	1
material	aluminium	aluminium
color	silver	silver



LED CEILING LIGHT FITTINGS FI60 / Choudhary / 2018 / Domotex / Hannover

DOWNLIGHT COB 10W

+ info

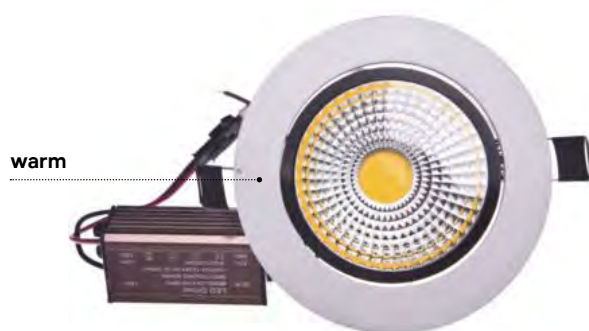

cold:
a: $\varnothing 110$ mm
b: 70 mm
mounting hole: 98 mm

neutral:
a: $\varnothing 110$ mm
b: 75 mm
mounting hole: 98 mm

warm:
a: $\varnothing 140$ mm
b: 70 mm
mounting hole: 120 mm

cold temperature:

quantity	212
reordering option	yes
wattage [W]	10
luminous flux [Lm]	950
color temperature [K]	6000 -
base	LED COB
beam angle [°]	80
weight [kg]	0,5
optimal instalation height [m]	2 - 3
max. instalation height [m]	3
min. instalation height [m]	2
heat output	low
cable length [m]	1,5
material	aluminium
color	white

neutral temperature:

quantity	293
reordering option	yes
wattage [W]	10
luminous flux [Lm]	950
color temperature [K]	4000
base	LED COB
beam angle [°]	90
weight [kg]	0,4
optimal instalation height [m]	2 - 3
max. instalation height [m]	3
min. instalation height [m]	2
heat output	low
cable length [m]	1,5
material	aluminium
color	white

warm temperature:


quantity	137
reordering option	yes
wattage [W]	10
luminous flux [Lm]	950
color temperature [K]	3000
base	LED COB
beam angle [°]	90
weight [kg]	0,55
optimal instalation height [m]	2 - 3
max. instalation height [m]	3
min. instalation height [m]	2
heat output	low
cable length [m]	1,5
material	aluminium
color	white



DOWNLIGHT COB 10W - cold / Percival / 2018 / Aix / Hamburg

LED CEILING LIGHT FITTINGS COB 10W SUPER LED

+ info




a: ø 162 mm
b: 58 mm
mounting hole: 106 mm

quantity	173
reordering option	yes
wattage [W]	10
luminous flux [Lm]	650
color temperature [K]	6000 - cold
base	LED COB
beam angle [°]	90
weight [kg]	0,4
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	2,3 m
material	aluminium
color	white

LED CEILING LIGHT FITTINGS COB 12W

+ info



a: 107 mm
b: 68 mm
mounting hole: 98 mm


quantity	200
reordering option	yes
wattage [W]	12
luminous flux [Lm]	1100
color temperature [K]	6000 - cold
base	LED COB
beam angle [°]	90
weight [kg]	0,2
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	2,2
material	aluminium
color	white

LED CEILING LIGHT FITTINGS COB 15W

+ info



ilość	200
możliwość dokupienia	tak
moc [W]	15
strumień [Lm]	1400
barwa [K]	6000 – zimna
typ źródła światła	LED COB
kąt [°]	90
waga [kg]	0,35
sugerowana wys. montażu [m]	2 – 3
max wys montażu [m]	3
min wys. montażu[m]	2
emisja ciepła	niska
dł. kabla [m]	2,25
materiał	aluminium
kolor	biały





a: 138 mm
b: 83 mm
mounting hole: 121 mm

LED CEILING LIGHT FITTINGS COB 7W

+ info




quantity	70
reordering option	yes
wattage [W]	7
luminous flux [Lm]	550
color temperature [K]	6000
base	LED COB
beam angle [°]	90
weight [kg]	0,25
optimal instalation height [m]	2 – 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	2,25
material	plastic
color	white



a: ø 85 mm
b: 70 mm
mounting hole: 70 mm

LED CEILING LIGHT FITTINGS KOBİ OH 36


+ info



a: ø 80 mm
b: 84 mm

quantity	18
reordering option	yes
wattage [W]	10
luminous flux [Lm]	550
color temperature [K]	2700 - 6500
base	GU - 10
beam angle [°]	120
weight [kg]	0,27
optimal instalation height [m]	2,5
max instalation height[m]	2,5
min instalation height[m]	5
heat output	low
cable length [m]	-
material	metal
color	black


3 _ ARMS

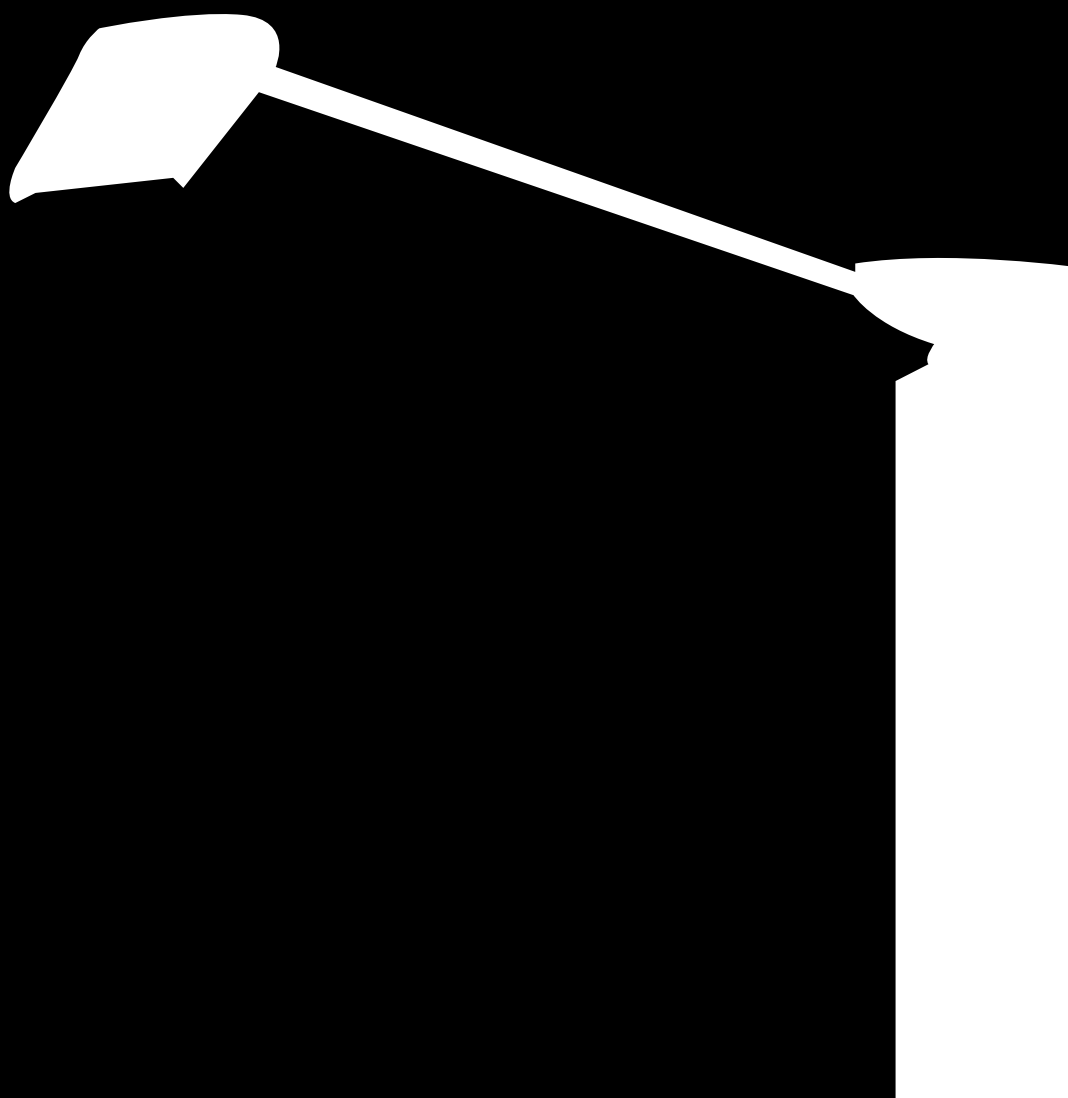

JEWELLERY ARM LED LIGHT 30 CM

+ info

quantity	21
reordering option	yes
wattage [W]	2 x 1,5
luminous flux [Lm]	2 x 80
color temperature [K]	4000
base	LED
beam angle [°]	38
weight [kg]	0,5
optimal instalation height [m]	cabinets / expositions
max instalation height[m]	-
min instalation height[m]	-
heat output	low
cable length [m]	2,2
material	aluminium
color	black




a: 300

JEWELLERY ARM LED LIGHT 22 CM

+ info

quantity	14
reordering option	yes
wattage [W]	0,9
luminous flux [Lm]	50 - 70
color temperature [K]	5000 - 6000
base	LED
beam angle [°]	90 - 100
weight [kg]	0,15
optimal instalation height [m]	cabinets / expositions
max instalation height[m]	-
min instalation height[m]	-
heat output	low
cable length [m]	0,2
material	aluminium
color	silver




a: 220 mm

HALOGEN ARM LIGHT ELSTAR

+ info

	warm
quantity	120
reordering option	yes
wattage [W]	150
luminous flux [Lm]	2250
color temperature [K]	2900
base	R7S
beam angle [°]	80 - 90
weight [kg]	0,65
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	high
cable length [m]	1,5
material	aluminium
color	grey




warm:
a: 135 mm
b: 485 mm

LED ARM LIGHT

+ info

quantity	527
reordering option	yes
wattage [W]	23
luminous flux [Lm]	1547
color temperature [K]	6000 - 6500
base	LED SMD
beam angle [°]	-
weight [kg]	0,5
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	2
material	aluminium
color	silver



a: 145 mm
b: 500 mm

9.1F51

FIBARO
HOME INTELLIGENCE

FIBARO
HOME INTELLIGENCE

FIBARO
HOME INTELLIGENCE

HÄNDLERZONE
INSTALLATEURZONE

hue

LEST

SmartThings

EINFACHE INSTALLATION

Cool Automation

danalock

D-Link

Google Assistant

amazon alexa

YAMAHA

BOSE

SONOS

Russound

MUSON

PLUS & PLAY

FIBA
HOME INTELLIGENCE

FIB
HOME INTELLIGENCE
Kabelloses Smart

ARO

You

FIBARO® HOME INTELLIGENCE

FIBARO®
HOME INTELLIGENCE

ARO
LLIGENCE
me-System

Your home, Your imagination

FIBARO.COM




3 THINK. SENSE. SPEAK.
THE FUTURE OF HOME AUTOMATION.



BACnet KNX Z-Wave ZigBee

4 _ LIGHTBOX

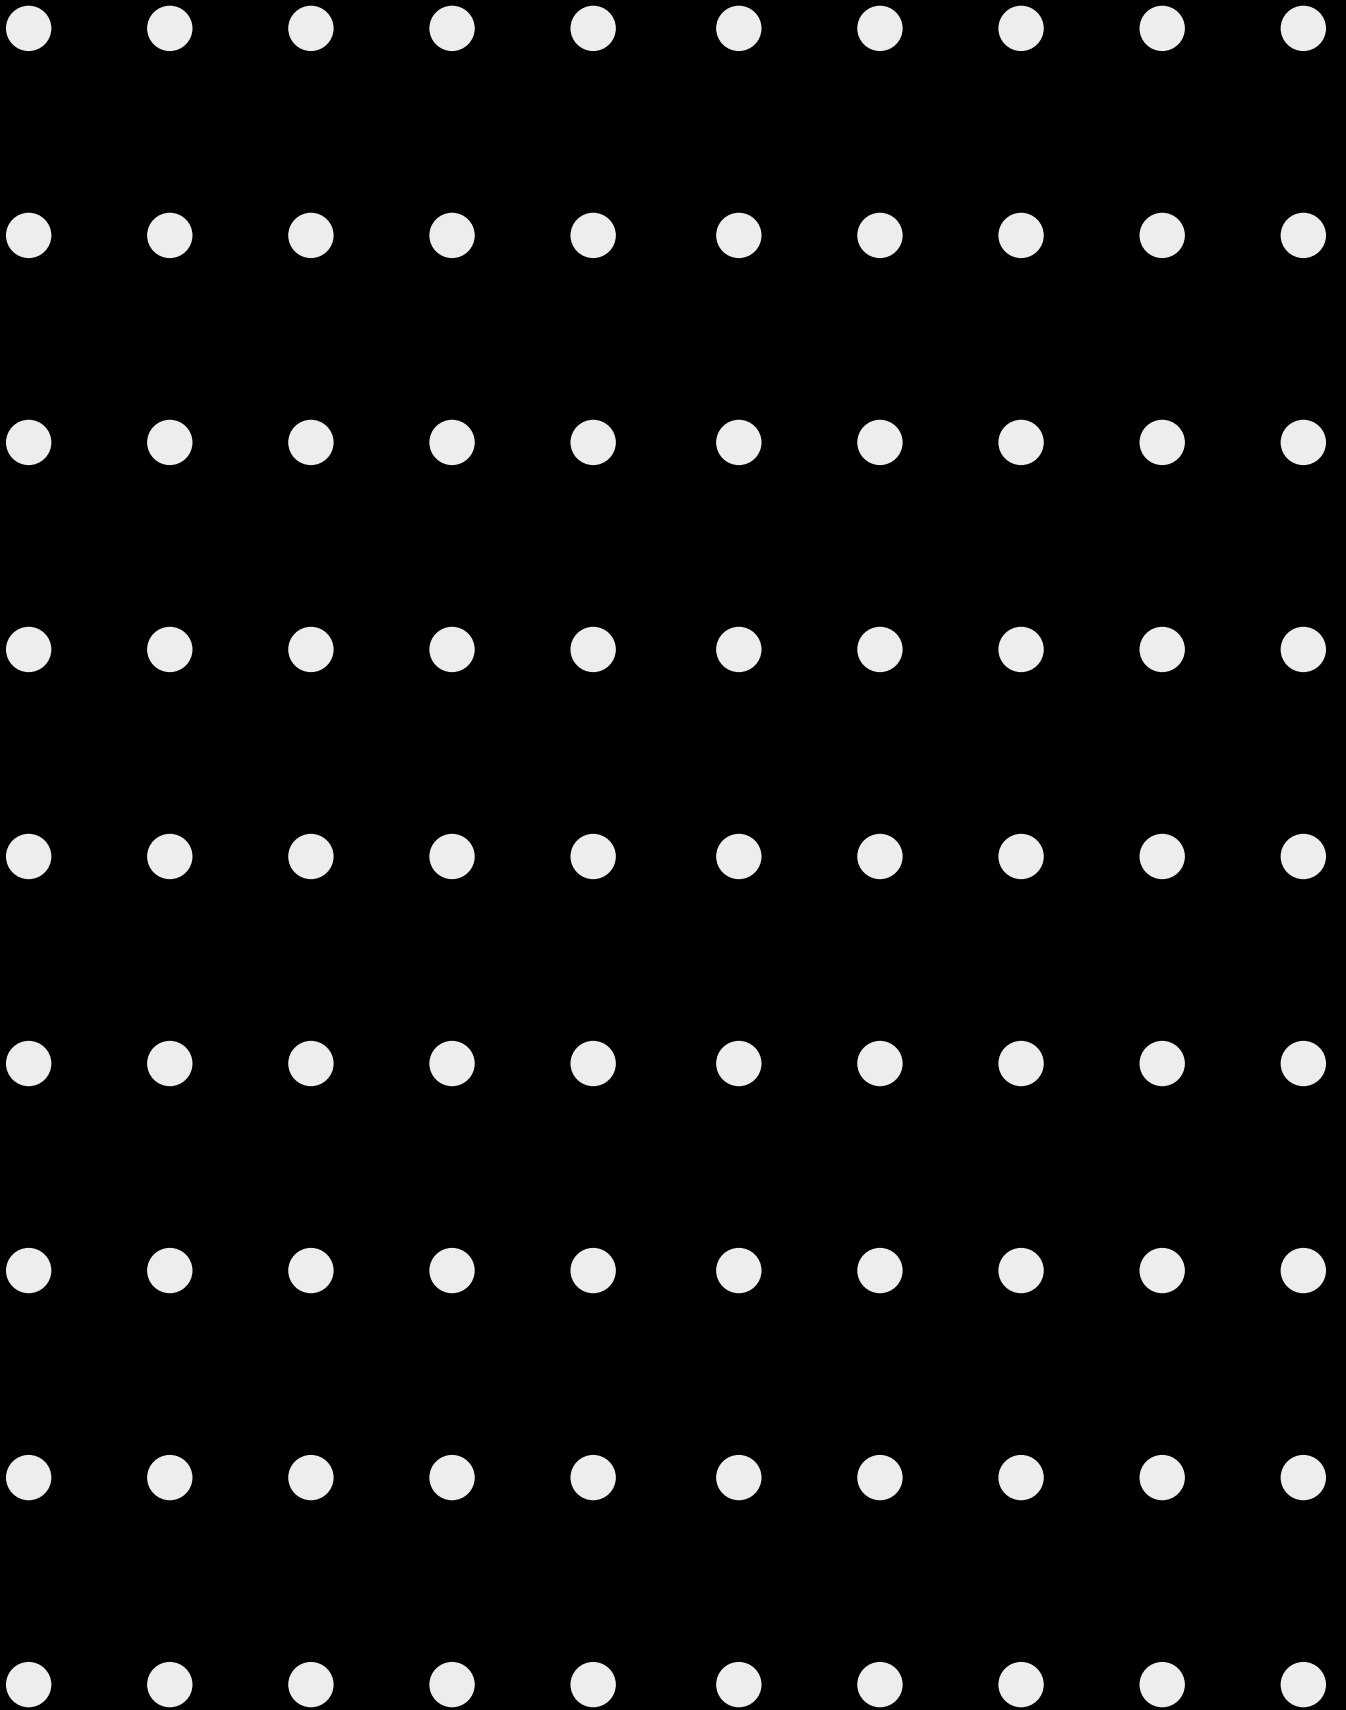






LED PANEL / Anwis / 2018 / R+T / Stuttgart





EDGE - LIT LIGHTBOX / NYC / WTM / 2017 / London


5 _ WALL LAMP

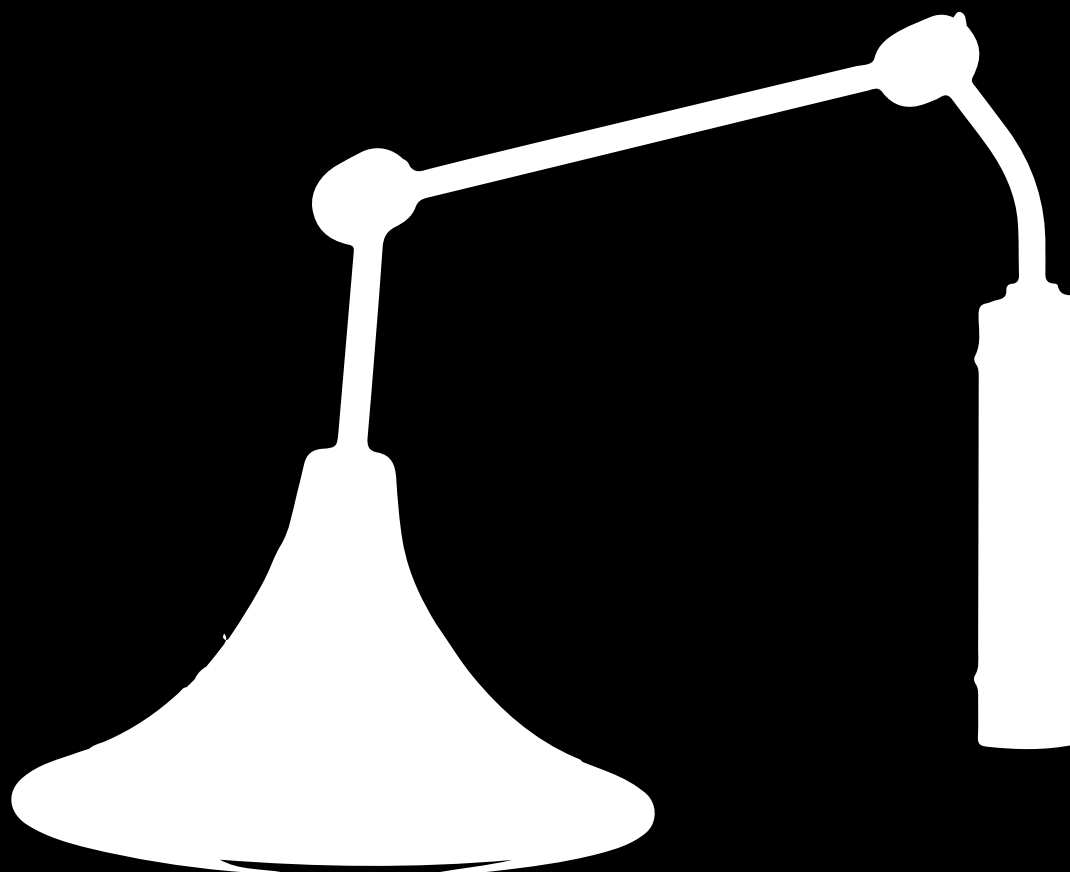

ANTIKA BLACK

+ info


quantity	11
reordering option	yes
wattage [W]	10
luminous flux [Lm]	1055
color temperature [K]	2700 - 6500
base	E-27
beam angle [°]	100 - 160
weight [kg]	1,3
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
material	steel
color	black



LOFT

+ info


quantity	13
reordering option	yes
wattage [W]	10
luminous flux [Lm]	1055
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	100 - 160
weight [kg]	1,1
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
material	steel
color	black

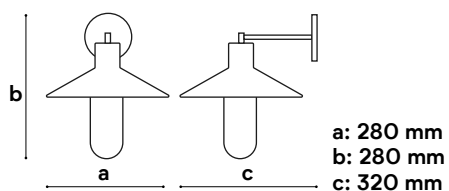

REALITY

+ info


quantity	12
reordering option	yes
wattage [W]	10
luminous flux [Lm]	1055
color temperature [K]	2700 - 6500
base	E-27
beam angle [°]	100 - 160
weight [kg]	1,3
heat output	low
material	glass
color	white



BROLO

+ info


quantity	5
reordering option	yes
wattage [W]	2 x 14
luminous flux [Lm]	3094
color temperature [K]	2700 - 6500
base	2 x E27
beam angle [°]	180
weight [kg]	0,65
optimal instalation height [m]	2 - 3
max instalation height [m]	3
min instalation height [m]	2
heat output	low
cable length [m]	1
material	plastic
color	white



LILHOLMEN

+ info

quantity	3
reordering option	yes
wattage [W]	6
luminous flux [Lm]	470
color temperature [K]	2700 - 6500
base	E-14
beam angle [°]	90 - 160
weight [kg]	1,2
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
material	metal + glass
color	brass




a: ø 140 mm
b: 250 mm
c: 160 mm

INSPIRE


+ info


quantity	8
reordering option	yes
wattage [W]	4,6
luminous flux [Lm]	400
color temperature [K]	3000
base	LED
beam angle [°]	90
weight [kg]	0,6
optimal instalation height [m]	2 - 3
max instalation height [m]	3
min instalation height [m]	2
heat output	low
cable length [m]	1
material	steel +plastic
color	chrome



a: 180 mm
b: 145 mm
c: 125 mm

6 _ DECORATIVE LAMPS

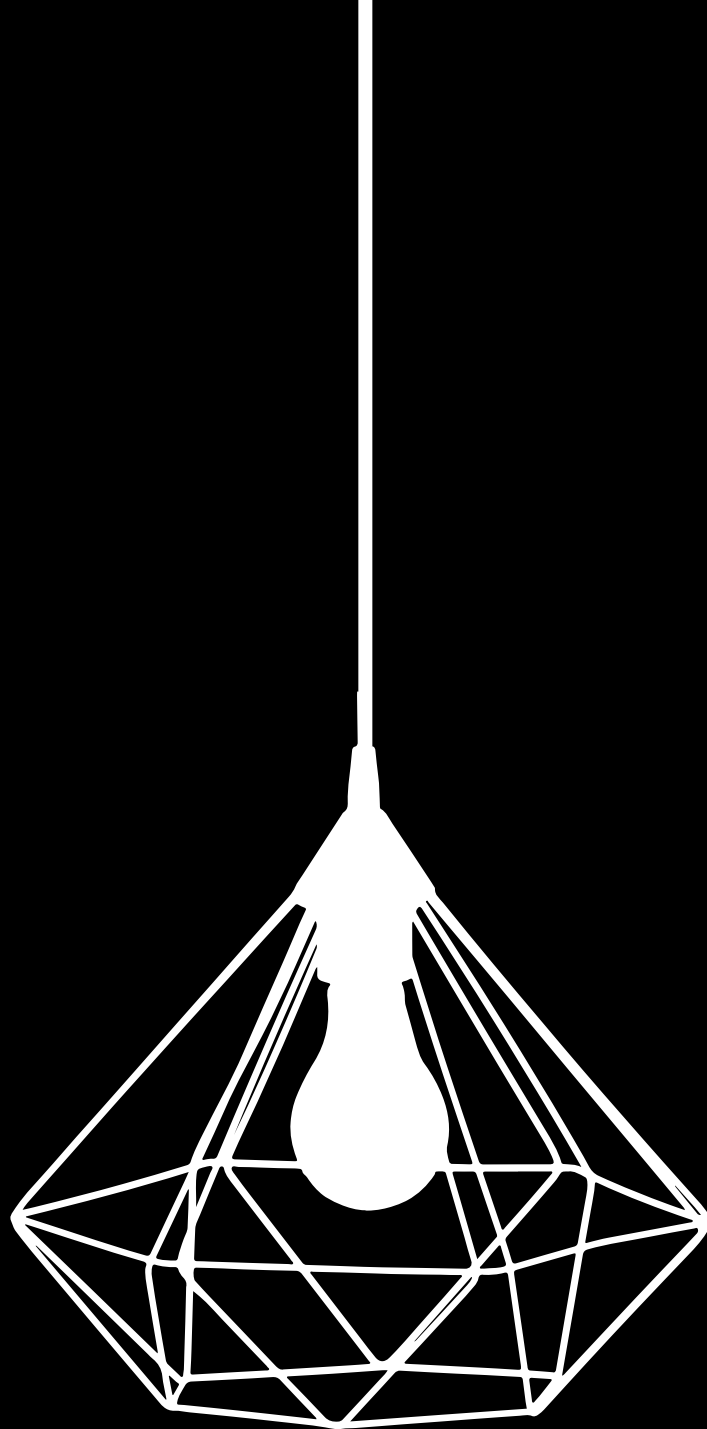




a: ø 200 mm

EGLO RONDO

+ info

quantity	156
reordering option	yes
wattage [W]	14
luminous flux [Lm]	1521
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	1,4
optimal instalation height [m]	2 - 5
max instalation height [m]	5
min instalation height [m]	2
heat output	low
cable length [m]	2 - 5
material	glass
color	white



a: ø 450 mm


CUMULUS

+ info

quantity	6
reordering option	yes
wattage [W]	14
luminous flux [Lm]	1521
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	0,15
optimal instalation height [m]	floor lamp
heat output	low
cable lenght [m]	1
material	plastic
color	white




EGLO RONDO / Wyplay / 2017 / IBC 2017 / Amsterdam



TAMEN INSPIRE

+ info

quantity	15
reordering option	yes
wattage [W]	14
luminous flux [Lm]	1521
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	1,25
optimal instalation height [m]	2 - 5
max instalation height [m]	5
min instalation height [m]	2
heat output	low
cable length [m]	2
material	plastic
color	black




ALFA BOLT

+ info

quantity	6
reordering option	yes
wattage [W]	max. 60
luminous flux [Lm]	-
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	1
optimal instalation height [m]	od 1,3
max instalation height [m]	-
min instalation height [m]	1,3
heat output	low
cable length [m]	1,5
material	glass
color	white



TAMEN INSPIRE / Drutex / 2016 / SAIE / Bologna




a: 540 mm
b: 680 mm

ARABICA

+ info

quantity	4
reordering option	nie
wattage [W]	10
luminous flux [Lm]	1055
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	90 - 160
weight [kg]	1,2
optimal instalation height [m]	2 - 5
max instalation height [m]	3
min instalation height [m]	2
heat output	low
cable length [m]	1,5
material	plywood
color	natural wood



a: ø 300 mm
b: 900 mm

PORTORYKO

+ info

quantity	8
reordering option	yes
wattage [W]	60
luminous flux [Lm]	1055
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	90 - 160
weight [kg]	1,2
optimal instalation height [m]	3 - 5
max instalation height [m]	5
min instalation height [m]	3
heat output	low
cable length [m]	1
material	plywood
color	natural wood




ARABICA / Pol - Skone / 2018 / Budma / Poznań

CARUBA

+ info


quantity	6
reordering option	yes
wattage [W]	14
luminous flux [Lm]	1521
color temperature [K]	2700-6500
base	E27
beam angle [°]	280
weight [kg]	0,6
optimal instalation height [m]	2-5
max instalation height [m]	5
min instalation height [m]	2
heat output	low
cable length [m]	2m
material	plastic
color	white



INSPIRE IRING

+ info

quantity	1
reordering option	yes
wattage [W]	20
luminous flux [Lm]	1520
color temperature [K]	3000
base	LED
beam angle [°]	90
weight [kg]	1,45
optimal instalation height [m]	2 - 3
max instalation height [m]	3
min instalation height [m]	2
heat output	low
cable length [m]	1,2
material	plastic
color	chrome

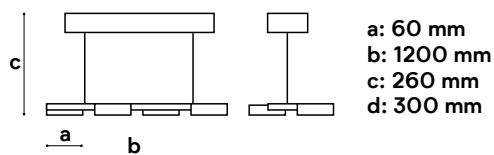




CARUBA / 2018 / IFA / Berlin



BAS

+ info

quantity	6
reordering option	yes
wattage [W]	14
luminous flux [Lm]	1521
color temperature [K]	2700-6500
base	E-14
beam angle [°]	280
weight [kg]	0,5
optimal instalation height [m]	2-3
max instalation height [m]	3
min instalation height [m]	2
heat output	low
cable length [m]	1,5 m
material	plate
color	white




a: ø200 mm
b: 190 mm

KOPENHAGEN LOFT

+ info

quantity	8
reordering option	yes
wattage [W]	12
luminous flux [Lm]	95
color temperature [K]	2700-6500
base	E27
beam angle [°]	280
weight [kg]	0,5
optimal instalation height [m]	od 1,3
max instalation height [m]	-
min instalation height [m]	od 1,3
heat output	low
cable length [m]	1,7
material	plastic
color	rusty



a: ø 120 mm
b: 210 mm




KOPENHAGEN LOFT / PKP / 2015 / Trako / Gdańsk



TARBES

+ info

quantity	1
reordering option	yes
wattage [W]	14
luminous flux [Lm]	1521
color temperature [K]	2700-6500
base	E27
beam angle [°]	280
weight [kg]	0,45
optimal instalation height [m]	2 - 3
max instalation height [m]	3
min instalation height [m]	2
heat output	low
cable length [m]	1 m
material	steel
color	black




a: ø 325 mm
b: 280 mm



INSPIRE BYRON

+ info

quantity	13
reordering option	yes
wattage [W]	60
luminous flux [Lm]	1055
color temperature [K]	2700-6500
base	E-27
beam angle [°]	90 - 160
weight [kg]	1,3
optimal instalation height [m]	3
max instalation height [m]	3
min instalation height [m]	2,5
heat output	low
cable length [m]	1,5 m
material	metal
color	black




a: ø 370 mm
b: 380 mm

RAKIJA

+ info

quantity	7
reordering option	yes
wattage [W]	14
luminous flux [Lm]	1521
color temperature [K]	2700-6500
base	E27
beam angle [°]	280
weight [kg]	1,8
optimal instalation height [m]	2 - 5
max instalation height [m]	5
min instalation height [m]	2
heat output	low
cable length [m]	2
material	glass
color	gold





a: ø 350 mm

FLOS AIM

+ info

quantity	1
reordering option	yes
wattage [W]	50
luminous flux [Lm]	550
color temperature [K]	2200-900
base	E27
beam angle [°]	120
weight [kg]	7,2
optimal instalation height [m]	2,5 - 3
max instalation height [m]	3
min instalation height [m]	2,5
heat output	low
cable length [m]	2
material	aluminium
color	black

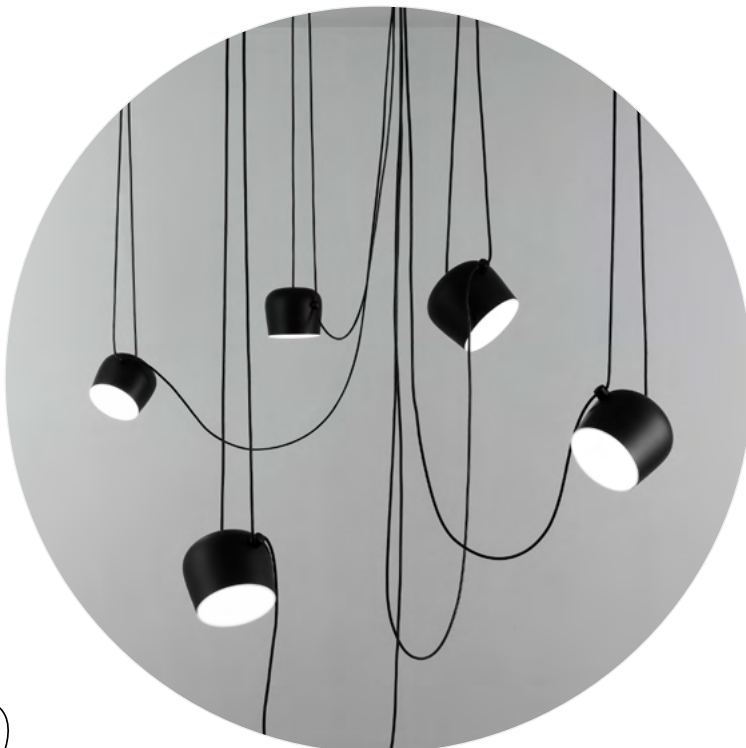


a: ø 150 mm
b: ø 155 mm

UPSTREET

+ info


quantity	2
reordering option	yes
wattage [W]	60
luminous flux [Lm]	1055
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	90 - 160
weight [kg]	3
optimal instalation height [m]	floor
heat output	low
cable lenght [m]	1
material	wood + steel
color	black + chrome



INDUSTRIAL DESIGN

+ info

quantity	2
reordering option	yes
wattage [W]	60
luminous flux [Lm]	1055
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	90 - 160
weight [kg]	3
optimal instalation height [m]	floor
heat output	low
cable lenght [m]	1
material	wood + steel
color	black + wood



a: ø 320 mm
b: 640 mm

www.smartdesign-expo.com